

MUSCLE TOOLS Q4 2023 EDITION

HIGH TECH **TO** HARD TECH



BOSCH

ROBINAIR

OTC

The most advanced diagnostics, tools & equipment

Works with
the Bosch ADS
625X diagnostic
scan tool


We develop ADAS vehicle
technologies for OEMs.
Trust us to recalibrate them.

Future-proof your investment with the
confidence that your calibrations are completed
to the tightest tolerances and the strictest
standards correctly, **the first time.**



[Learn More](#)

OTC TOOLS TO BEAT THE FLAT RATE

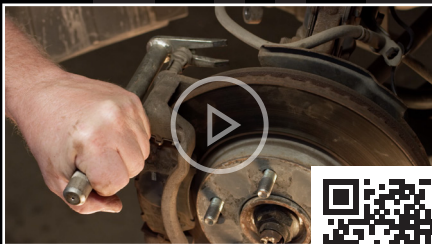

**7302 Brake Caliper
Pin-Bolt Remover**

[Learn More](#)



**1021, 1022, 1026, 1037
Jaw Pullers**

[Learn More](#)



Get YF Ready with Robinair

More on page 6



AC1234-4

Call to place your order today!

Bosch Customer Service
800 321-4889 (Ext. 4, Option 2)


OTC and Robinair Customer Service
800 533-6127 (Option 1)

A powerhouse lineup of repair solutions from the global leader in diagnostics



Professional Diagnostics

The next generation of scan tools with the most advanced OE level vehicle coverage supporting scanning, live data access and complete bi-directional functions.

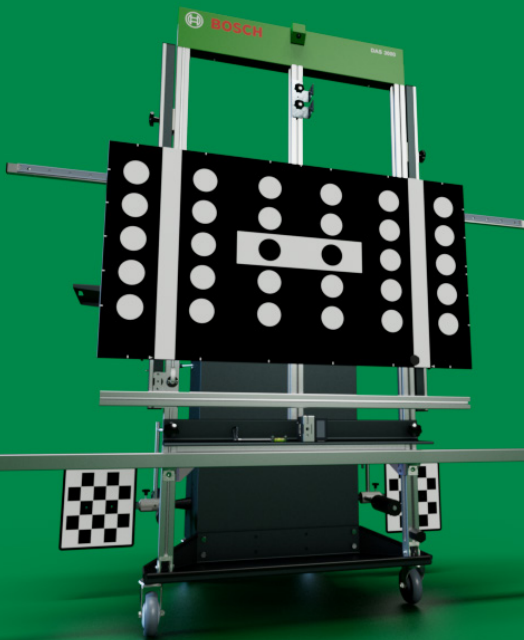

ADAS Recalibration

A seamless, full-system solution that guides you from setup through calibration in half the time.



Heavy Duty Diagnostics

Heavy duty solutions to help you get the repair done right and the vehicle back in operation.




Test, Tune and Analyze

Test, analyze and diagnose your vehicle electrical and mechanical systems.



30-DAY MONEY BACK GUARANTEE


Purchase and register a Bosch ADS 525X, ADS 625X, or 3824A ESI[truck] diagnostic tool. If you are not satisfied with your new tool, return it to Bosch within 30 days of invoice date for a full refund. **For more information about the 30-Day Money Back Guarantee, call 1-855-BOSCHTECH (1-855-267-2483).**

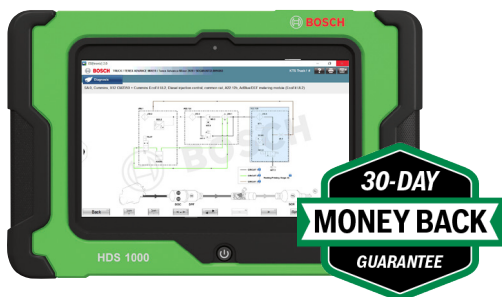**3824A****ESI[truck] Heavy Duty Diagnostic Solution**
Truck, engine, and system coverage

- HDS 1000 10" touchscreen Windows® 10 tablet
 - Ruggedized drop-tested tablet designed for the garage environment
 - Enhanced bidirectional controls
 - Injector coding, forced DPF regen, VGT relearning, special tests, component actuations & more
 - Proprietary ESI[truck] software saves valuable labor time with intuitive software — scan procedures the same for a Sprinter van to a Terex Titan dump truck
 - All-in-one subscription unlocks access to full color-wiring diagrams, live data stream, and repair information for all makes and models
 - All diagnostic functions continue after subscription expiration*
 - **Truck brands:** Freightliner, International, Kenworth, Mack, Volvo, Peterbilt, Sterling, Western Star, and more
 - **Engine brands:** PACCAR, Perkins, Detroit Diesel-MBE, Mack, Navistar, Caterpillar, Deutz, MTU, and more
 - **System coverage:** Transmissions, brake systems, trailer ABS, exhaust treatment, and more
- Expert-level diagnostics**
- Automatic vehicle ID
 - Fault code reading, reporting, clearing
 - Diesel particulate filter (DPF) regeneration
 - Cylinder cut-out
 - Injector coding and trim files
 - Key component actuations
 - Special tests
 - Vehicle parameter modifications
 - Includes 30-day free Troubleshooting & Repair Trial

3824A-TBL**Heavy Duty Tablet Upgrade**

- Everything you need to upgrade an existing 3824 ESI[truck] Tablet to the new and improved 3824A model
- Windows 10 Touchscreen tablet

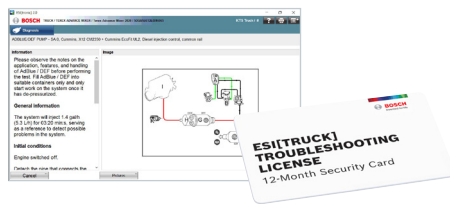**3824-08R****Troubleshooting & Repair Subscription**

- Faster, more efficient heavy duty vehicle repairs
- 13,000+ procedures guide user through each step to troubleshoot vehicle issues
- Procedures by DTCs or by vehicle symptoms
- Technical Service Bulletins (TSBs) included

*Applies to Truck (3824A and 3824-08) and OHW (3824CBL-UPG and 3824-080HW) Coverage

The Bosch ESI[truck] platform is unlike any other in the industry, taking heavy duty diagnostics to the next level.

3824CBL-UPG**ESI[truck] Off-Highway Upgrade Cable Kit with Introductory Software License**

Add off-highway vehicle and machinery coverage for multiple manufacturers to your 3824 or 3824A ESI[truck] scan tool.

- **Coverage included for:** Construction equipment, agricultural vehicles, stationary engines, street sweepers and more
- **Manufacturer coverage:** Caterpillar, John Deere, Kubota, Perkins, Volvo, Massey Ferguson, SISU, Deutz, Deutz-Fahr, MTU, and more
- **System coverage:** Gearbox, HVAC, engine, steering, hydraulic systems, suspension, electronic modules, antipollution, central computer and more
- **Diagnostic coverage:** Manual processes, diagnosis info, measurable values, component actuations, ECU data, parameter IDs (PIDs), calibrations and resets, system technical data, wiring diagrams, vehicle technical data and vehicle maintenance info

Kit contents:

- 10 cables for machinery, construction equipment, agricultural vehicles and more
- ESI[truck] off-highway software package with full diagnostic capabilities. Introductory off-highway software expires when your ESI[truck] heavy duty truck software expires
- Software renewals can be done simultaneously, ensuring continuous HD truck and off-highway vehicle coverage

3824BSC**ESI[truck] Software and Adapter Kit**

- Includes the ESI[truck] platform features, adapters, software, and coverage for use on your own Windows 10 device
- ESI[truck] diagnostic software with the functions and aftermarket coverage techs need, RP1210 Data link adapter, 6 and 9 pin cables, and HD/OBD II cables

3824-08**ESI[truck] 1-Year Renewal License**

- 1-Year (12-month) renewal license for existing ESI[truck] user

3824-080HW**ESI[truck] Off-Highway 1-Year Software License**

- 12-months of off-highway diagnostic coverage, including all coverage updates
- Used to renew initial software included with Off-highway upgrade cable kit with introductory software license

For more information on software updates and off-highway coverage upgrades, visit boschdiagnostics.com

Off-highway cable upgrade kit and off-highway software only compatible with 3824A, 3824 and 3824BSC ESI[truck] diagnostic tools. Customer must first purchase Off-highway upgrade cable kit with introductory software (3824CBL-UPG) prior to purchasing or activating Off-highway 1-year software license (3824-080HW)



Battery and Electrical System Analyzers



3920

3920 VET 100 Circuit Analysis Tool

Quickly identify electrical issues in failed circuits

- Perfect tool for Data stream analysis using your scan tool
- Identify failed circuit component, wiring or PCM
- Simulates the sensor you are diagnosing by inputting a determined voltage at the sensor location
- Allows input voltage from .5VDC -7VDC in .5VDC increments
- Use your scan tool to verify if correct voltage is being applied to circuit
- Bypass sensor to send desired voltage back to PCM
- Works with 12V and 24V systems with vehicle voltage displayed. Also includes a "flashing" low battery voltage indicator



3926

BAT 35

Vehicle Computer Memory Saver

BAT 35 maintains the memory of the on-board vehicle computer to prevent losing memory settings when you disconnect a battery.

- Retain computer memory and on board memory sets such as: keyless entry codes, seat memory, digital radio settings, clocks, car alarms etc.
- Includes 12V, 7amp hour lead acid, sealed battery for long life expectancy
- Six LED indicator lights, three for charging functions and three for power storage conditions for ease of use
- Built-in OBD II cable for vehicle power supply while vehicle battery is disconnected



F00E9001013CM

MMD 540H CAT III Multimeter

Auto-ranging digital multimeter for use in diagnostics of electronic circuits (automotive, fleet, motorcycle, marine or small engine)

The MMD 540H offers:

- CAT III (1000V) safety rating for hybrid vehicle circuits
- Peak, Min/Max readings as fast as 1 millisecond
- Inductive RPM clamp for conventional and DIS ignition systems
- Fused diagnostic test leads provide safe troubleshooting (up to 20 amps) at the circuit fuse location
- K-Type thermocouple for quick temperature measurement
- Large LCD display with bright backlighting and auto shutdown
- Rugged nylon case with handle for storage



BAT155

BAT 155

Heavy Duty Battery and Electrical System Analyzer

- 100 - 6,000 Cold Cranking Amp (CCA) Test Capacity
- Enables Testing Battery Packs (Multiple Batteries connected together) in the vehicle
- Infrared Temp Sensor for measuring battery temp (increases accuracy of CCA measurement)
- Optional Amp Probe and Voltmeter
- Tests 6V, 12V batteries and 12V, 24V charging systems



0684010050480

FSA 050

CAT IV, CAT III Insulation Tester

Convenient, wireless testing for electric and hybrid drives (Cars, trucks, SUVs, etc). The FSA 050 CAT IV, CAT III Insulation Tester functions as a standalone multimeter or high-voltage meter. Alternatively, transmit the test data wirelessly to your Windows device for further review and analysis.

Future-proof as a standalone device or as a special accessory.

Common use cases:

- High voltage electric AC compressor
- High voltage shorts to ground
- Battery Packs
- Determine Isolation or insulation faults

TPA 300 TPMS Programming Tool

Grow your aftermarket solution with complete TPMS sensor coverage



Compatible with any Bosch manufactured diagnostic tool

3934


Pair with any Bosch diagnostic tool to program new sensor IDs via OBD

- Activate and read TPMS sensor data, program sensors, check remote keyless entry signal and display sensor data in seconds
- Perform OBD II relearns within minutes when paired with a compatible Bosch manufactured diagnostic scan tool
- Full database of indirect, manual and auto relearn procedures
- Intuitive, full-color display with easy vehicle lookup by make, model and year
- Supports all known OE and aftermarket programmable sensors for all light vehicles
- New features, vehicles and sensor coverage added regularly
- Includes 3 years of free software updates

ADAS Recalibration System

DAS 3000

A complete ADAS recalibration package that enables shops to quickly, easily and precisely recalibrate Automated Driver Assist System

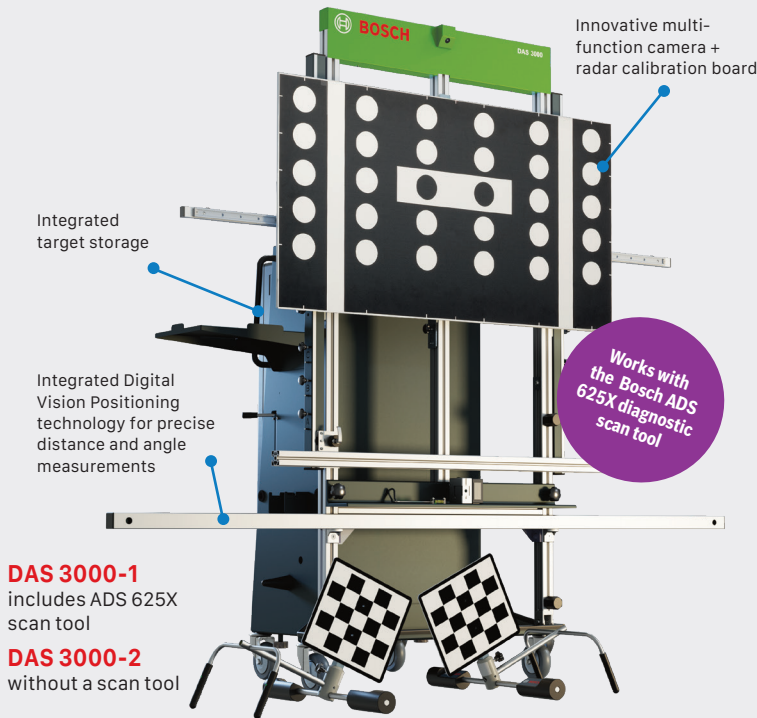


DAS 3000-1
includes ADS 625X
scan tool

DAS 3000-2
without a scan tool


Calibration Mats

Brand specific equipment for the proper calibration of the Rear and Surround View cameras according to the OEM specifications implemented by Bosch routines and workflows.

Near Range Camera Systems for Volkswagen group




Calibration set for 360°
Cameras Generation 2:
CTA 500-1



Calibration set for Rear Camera:
CTA 501-1

Near Range Camera Systems for Mercedes-Benz



Calibration set for Rear Camera:
CTA 511-1

Leak Testers

Safe and cost-effective leak detection solutions for passenger and heavy duty vehicles



SMT 300

SMT 300

LeakTamer II EVAP & Diagnostic Smoke Machine

- Multi-purpose tester designed not only for EVAP testing but for leak detection in any low pressure closed system including oil leaks, exhaust leaks, wind leaks, water leaks, EGR leaks and many more
- Fully featured machine with graduated smoke flow control valve, air flow meter, and pressure/vacuum decay gauge
- Full complement of accessories and storage case included



SMT 500

SMT 500

Portable Leak Detector

- On Board Air compressor eliminates need for shop air or inert gas tank during use
- Variable flow control detect leaks as small as 0.01" in sealed systems
- Pressure decay testing
- Compact, lightweight design (ultra-portable at 11 lbs)



1699500000

HPT 500

High Pressure Leak Tester

- Produces leak detection "smoke" at higher pressure than standard machines (up to 20psi) for higher pressure systems
- Higher flow rate fills the system with smoke up to 5 times faster
- Ideal for finding leaks in exhaust after-treatment systems
- Test entire system, from intake to exhaust, in one 15 minute test
- High-pressure and large volume systems found in heavy-duty truck and turbocharged passenger vehicles

Get your shop 1234yf ready



What do I need to service R-1234yf systems?

- › A new machine meeting SAE J2843 standard; Robinair's AC1234-4 or AC1234-9
- › A new leak detector meeting SAE J2913 standard; Robinair's LD3, LD5 or LD7
- › A syringe-type oil injector to inject oil back into the system; Robinair's 18465
- › Optional tracer gas leak detector to reduce cost searching for leak; Robinair's LD9-TG

AC1234-9
Connected

A New Leak Detector

Your existing leak detector may not recognize R-1234yf, meaning you may not catch an expensive refrigerant leak. Invest in one that meets SAE J2913 and J2791 standards.

- › LD3 leak detector automatic calibration and audible alerts
- › LD5 leak detector with bar graph mode and color display
- › LD7 premium leak detector with bar and pinpoint graphing modes and detects both R134a and R1234yf.



LD7 shown

New Syringe-Type Oil Injectors

1234yf systems have different fittings and couplers, requiring a new syringe-type oil injector to put oil back into the system. Current SAE standards for 1234yf service does not allow automatic oil injection on a machine.

- › 18465 PAG-labeled 1234yf injector for low-voltage systems in gas and diesel vehicles
- › 18470 POE-labeled 1234yf injector for electric and hybrid vehicles



18465 shown

**80211TMP****Bluetooth temp probes master kit**

- Read and track temperatures from multiple locations from your A/C machine
- Use up to 2 probes per compatible Robinair machine
- Enables WiFi and Bluetooth capabilities on NI and AC1234-4 machines

**80211VCI****VCI master kit + database**

- Enables WiFi and Bluetooth capabilities on NI and AC1234-4 machines
- Wirelessly gather and transmit vehicle year, make and model info to your compatible Robinair machine
- Includes current-year refrigerant capacity database to quickly determine correct refrigerant charge, oil type and oil capacity
- Also reads generic OBDII codes to help troubleshoot A/C system issues

What wireless accessories fit my machine?

Non-wireless A/C Machine			Wireless Enabled A/C Machine	
A/C Machine	VCI	Temp Probes	VCI	Temp Probes
34288NI, 34788NI, 34788NI-H, 34988NI	80211VCI	80211TMP	ACS-250*	80213 or 80212*
34998, AC1234-9	—	—	ACS-250**	80213 or 80212
AC1234-4	80211VCI	80211TMP	ACS-250*	80213 or 80212*

*Use of ACS-250, 80212 or 80213 on NI or AC1234-4 requires machine first be WiFi/Bluetooth enabled using either 80211TMP or 80211VCI master kit

**Database purchase required for vehicle refrigerant capacity

Find leaks and diagnose system issues faster

Connected accessories, leak detectors, refrigerant analyzers and tracer gas detectors for R-134a and R-1234yf service

**16995****R-ID Plus refrigerant identifier/analyzer**

- Analyze R-134a and R-1234yf refrigerant for purity and contamination
- Prevent contaminated refrigerant from being pulled into your machine
- Includes printer to add refrigerant purity to service report
- R-134a and R-1234yf tank adapter; R-134a and R-1234yf hoses included
- Available as 16990 R-ID without printer

**EVDC100****A/C Electronic Variable Displacement Compressor Tester**

- Eliminates misdiagnosing electronic variable displacement A/C compressors
- Quickly diagnosis and verify valve function, lowering total repair time and costs
- Adjustable tester output
- Includes connect adapters for both old and newer style compressors
- Heavy duty battery clips and cable provides power from vehicle battery, eliminating the need for batteries
- Made in the USA

**LD7****Premium refrigerant leak detector**

- Detects R-1234yf and R-134a leaks for use on most vehicles
- Sweep, bar graph and line graph modes make finding leaks faster, easier
- Features audible detection alert, UV LED lights for use with UV dye and inspection light
- Sensor life up to 10 years for reliable leak detection
- Available as LD3 and LD5 versions

**LD9-TGKIT****Tracer gas leak detector service kit**

- Use inexpensive Tracer gas instead of costly refrigerant to find leaks
- Tracer gas is a 95% nitrogen, 5% hydrogen mixture and harmless to A/C systems
- The LD9-TG detector sniffs out hydrogen, detecting leaks faster and at less cost
- Kit includes 1234yf coupler, 134a coupler, Tracer gas detector, hose and Tracer gas regulator
- Available as LD9-TG, Tracer gas detector only

Combining Simple Operation with Superior Accuracy

These machines will test, recover and recharge R-134a and R-1234yf automotive A/C system quickly and accurately.



Features	34288NI	34788NI	34788NI-H	34988NI	34998	AC1234-4	AC1234-9
Fully Automatic Function: Program to recover, vacuum, leak test and charge without operating panel valves.	Manual Valves	✓	✓	✓	✓	✓	✓
Automatic fluid drain/inject	Oil drain	Oil drain/inject*	Oil drain	Oil drain/inject, dye inject**	Oil drain/inject, dye inject**	Oil drain	Oil drain
A/C System Flush: Flushes a vehicle's A/C system with refrigerant, eliminating any residual oil or other liquid. (Flushing adapters not included)	—	—	✓	✓	✓	✓	✓
Save & print before and after service data: Allows the user to store before and after service information by vehicle and print this information to provide to a customer.	—	✓	✓	✓	✓	✓	✓
Visual & Audible Alarm: Notifies the user when service is complete, or if a problem has occurred.	—	✓	✓	✓	✓	✓	✓
Vacuum Leak Test: Monitors level after evacuation, informs of possible leak.	—	✓	✓	✓	✓	✓	✓
Automatic Air Purge: Eliminates system-damaging air without monitoring gauges or opening valves.	✓	✓	✓	✓	✓	✓	✓
Automatic Refrigerant Refill: Maintains a user-selectable amount of refrigerant in an internal vessel and signals when it's time to change supply tank.	—	✓	✓	✓	✓	✓	✓
Vacuum Feature: Defaults to 15 mins, programmable up to 99 mins. "Remaining time" is displayed.	✓	✓	✓	✓	✓	✓	✓
Multilingual display	4.3" color LCD	4.3" color LCD	4.3" color LCD	7" color LCD	10.5" hi-res touch screen	4.3" color LCD	10.5" hi-res touch screen
Refrigerant Charging:	Low only	High, low or both	High, low or both	High, low or both	High, low or both	High, low or both	High, low or both
Refrigerant Management System: Displays refrigerant use and monitors remaining filter life. Prompts appear when 1/3 of filter life remains.	✓	✓	✓	✓	✓	✓	✓
Electric Vehicle: Capable of servicing high voltage electric compressor A/C systems.	—	—	✓	—	—	✓	✓
Printer	30038	30038	30038	Included	Mopria Print Service wireless printing	30038	Mopria Print Service wireless printing
Bluetooth temp probes: Dual-zone temp recording and reporting	80211TMP	80211TMP	80211TMP	80211TMP	80212 or 80213	80211TMP	80212 or 80213
Bluetooth VCI: Reads YMME and refrigerant capacity	80211VCI	80211VCI	80211VCI	80211VCI	ACS-250***	80211VCI	ACS-250***

* One oil bottle. ** Two oil bottles and one UV dye bottle. ***ACS-250 requires purchase of 34001 or 34002 database to read YMME and display refrigerant capacity

All machines use 34724 filter and 13172 maintenance kit

Syringe-type Injectors

Oil injectors for YF, EV and hybrid vehicles

Use these syringe-type injectors to add oil to a fully pressurized A/C system. Fill the barrel with the amount of oil needed, connect the injector, and press the plunger. Not recommended for UV dye injection.



R-134a Oil Injectors

18480 PAG labeled for gasoline and diesel vehicles

18490 POE labeled for hybrid and electric vehicles

R1234yf Oil Injectors

18470 POE-labeled 1234yf injector for electric and hybrid vehicles

18460 Unlabeled 1234yf oil injector

18465 PAG-labeled 1234yf injector for low-voltage systems in gas and diesel vehicles

Manifolds and Hose Set



41234

R1234yf Aluminum Manifolds and Hose Set

- Easy-to-read 3-1/8" adjustable gauges
- Durable aluminum manifold block with fittings

45111

2-Way Brass Manifold R134a Manifold Hose Kit

- 90° manual couplers
- 72" R134a hose set

TESTED AND TRUSTED SAFETY FOR LIFE

All jacks are covered by a limited lifetime warranty



NEW CONNECTED ADAPTER EXPANSION KITS



CA7149 CONNECTED ADAPTER STARTER KIT

- 7 connected cups & adapters hold securely to C-frame and drive screw
- 235+ vehicle models covered, from Honda Accord to Ford F-350s
- Backwards compatible with all OTC ball joint kits and adapters



CA6630 CONNECTED ADAPTER PROFESSIONAL KIT

- 25 connected cups & adapters hold securely to C-frame, making R&I easier
- 600+ vehicle models covered, including compact cars up to HD trucks
- Fully illustrated manual with adapter callouts, diagrams and instructions by vehicle model
- Backwards compatible with all OTC ball joint kits and adapters


New Navistar Tools and Diesel Engine Adapters



5865

EGR Valve Puller

- Aids in removal of EGR valve on select Navistar engines
- Works on 2010 MaxxForce 9, 10 & DT engines; 2013 N9 and N10 engines with SCR
- Similar to Navistar OE tool ZTSE4941

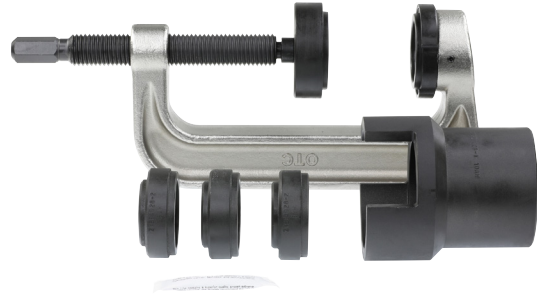

5867

Cab Mount Bushing Kit

- Easier removal and installation of cab-mounting bushings on select Navistar bodies
- Extra-large C-frame provides clearance and necessary force to R&E cab-mounting bushings
- Works on the following bodies: 9000i Series, DuraStar, HV, HX, LoneStar, LT, MV, PayStar, ProStar, RH, TerraStar, TranStar, WorkStar
- Similar to Navistar OE tool ZTSE4928

Heavy Duty Engine Stand and Engine Plates



1750A

6000 LB. Revolver Diesel Engine Stand

- 96 to 1 ratio worm and gear set rotates components a full 360°; handle locks in any position.
- Includes 205061 universal mounting plate for use with individual engine adapter plates.

1750

Engine stand without universal engine adapter assembly



1750-47389
Detroit Diesel



1750-47366
Mack / Volvo



1750-47022
Detroit Diesel



1750-4940
Navistar / IH



1750-4649
Navistar / IH



1750-4789
Navistar

Navistar and Detroit Diesel adapters

Item	Description	Application	Brand	Component	Requires use of 205061 plate
1750-47389	Detroit Diesel engine adapter plate	DD13 & DD15 engines	Detroit Diesel	Engine	No
1750-47366	Mack / Volvo engine adapter plate	MP7 / D11 engines	Mack / Volvo	Engine	No
1750-4940	Navistar / IH MaxxForce engine adapter plate	2010 - 2016 Navistar MaxxForce DT, MaxxForce 9, MaxxForce 10 engines	Navistar / International Harvester	Engine	Yes
1750-4649	Navistar / IH MaxxForce engine adapter plate	2004 - 2009 International Harvester DT466, DT570, HT570; Navistar MaxxForce DT, MaxxForce 9, MaxxForce 10 engines	Navistar / International Harvester	Engine	Yes
1750-4789	Navistar MaxxForce engine adapter plate	2007 - later MaxxForce 11, MaxxForce 13 engines	Navistar	Engine	Yes
1750-47022	Detroit Diesel MBE 900 engine adapter plate	Detroit Diesel 2004 - 2007 MBE 900 engines	Detroit Diesel	Engine	No

Safely lift and hold Class I, II and III vehicles - up to 3.5 tons



LDJA2-SET

LDJA2 2-ton aluminum racing jack

- Lift compact sedans to small crossovers
- Light, sturdy aircraft aluminum with carry handles is ideal for service trucks and portability

SA02 2-ton aluminum jack stands

- Pin-style jack stand for fast, secure vehicle holding
- Aircraft aluminum construction for rust-free performance

LDJA2-SET

- Includes LDJA2 2-ton aluminum jack and SA02 2-ton aluminum stands



LDJ2

LDJ2 2-ton low profile service jack

- Long reach low-profile jack for low ground clearance vehicles

LDJ35 3.5-ton steel service jack

- Safely handles large SUVs and crossovers to 3/4-ton pick-ups
- Rolled edges add strength to resist twisting for larger loads



S03

S04

S03 3-ton steel jack stands

S04 4-ton steel jack stands

- Ratcheting design cannot be released under load
- Formed and welded steel base with baked enamel finish for strength, corrosion resistance
- S03 and S04 sold as a pair

Service Jacks



	LDJA2	LDJ2	LDJ35
Capacity	2-ton	2-ton	3.5-ton
Lifting range	3-1/4" (saddle removed) - 18-5/8"	3"	5.2" to 21.9"
Padded handle length	47.6"	50"	50" spring-loaded padded lower handle
Footprint	11.875" x 25.125"	14.29" x 32.67"	14.5" x 28.5"
Reach	72.75"	69"	78.5"
Saddle	4-1/2" dia., round	4" dia. round, rubberized	6" dia., flat steel, rubberized, pinned to lifting arm
Casters	4; 2.5" front fixed (2), 1.75" rear swivel (2)	4; 2.75" front fixed (2), 2.75" rear swivel (2)	4; 3.15" front fixed (2), 2.5" rear swivel (2)
Frame height	6"	2.75"	6.25"
Jack pack	LDJA2-SET, includes SA02 jack stands, pair	N/A	N/A

Jack Stands



	SA02 (sold as a pair)	S03 (sold as a pair)	S04 (sold as a pair)
Capacity	2-ton	3-ton	4-ton
Max height	15.44"	17-11/16"	23-13/16"
Min height	9-1/2"	12"	15-1/2"
Footprint	7" round base	8-1/4" x 7-1/2" square base; welded foot pads	Square base; welded foot pads
Adjustment	Pin lock; 6 slots	Ratcheting; 11 teeth	Ratcheting; 11 teeth
Saddle	Flat-top style, 2.17" x 2"	V-notch style, 1" x 3.5"	V-notch style, 1.3" x 4.3"

Covering the big classes for lifting it all



HDJ5

HDJ5 5-ton hydraulic service jack

- Designed to safely lift step vans and bucket trucks
- 3-position handle lays flat, 45° or 90° for storage and use

HDJ5P 5-ton hydraulic service jack with air-assist

- Same as HDJ5, with air/hydraulic assist to reduce effort to raise, lower vehicles



HDJ10

HDJ10 10-ton hydraulic service jack

- Ideal for bucket trucks and school buses
- Rugged steel frame and extra-large wheels for durability and strength

HDJ10P 10-ton hydraulic service jack with air-assist

Same as HDJ10, with air/hydraulic assist to reduce effort to raise, lower vehicles



HDJ20

HDJ20 20-ton hydraulic service jack

- 3-position spring-loaded handle can lay flat, 45° or 90°
- Foot and hand pump options to raise load quickly

5, 10, and 20-ton heavy-duty jacks



5, 10, 20-ton heavy-duty jacks	HDJ5	HDJ5P	HDJ10	HDJ10P	HDJ20
Capacity	5-ton	5-ton air-assist	10-ton	10-ton air-assist	20-ton
Lifting range	6" to 22"	5-7/8" to 22"	6.3" to 22"	6-3/8" to 22"	7-1/2" to 23.8"
Air pressure	—	80–120 PSI	—	80–120 PSI	—
Handle length	43" 3-position with lock and release controls	45.4" 3-position with lock and release controls	43-1/4" 3-position with lock and release controls	45.4" 3-position with lock and release controls	47-1/2", 3-position spring-assisted locking
Footprint	15" x 56"	14.2" x 55.5"	18" x 60"	18.9" x 60.8"	18-1/8" x 61-3/8"
Reach	47"	87"	51"	90"	110.4"
Saddle	5-1/8" dia., round	5.1" dia., round	6" dia., round	5-3/4" dia., round	6-1/2" dia., steel crown
Casters	4; 4.4" fixed front (2), 2.8" mid-body swivel (2)	4; 4.4" fixed front (2), 2.8" mid-body swivel (2)	4; 5.6" fixed front (2), 3.6" mid-body swivel (2)	4; 5.6" fixed front (2), 3.6" mid-body swivel (2)	6; 4 front fixed; 2 mid-body swivel
Frame height	7.9"	7.5"	9.8"	9.8"	10.2"



S06 6-ton steel jack stands

- Ratcheting design cannot be released under load
- Formed and welded steel base with baked enamel finish for strength, corrosion resistance



S020 20-ton steel jack stand

- Large 15-1/2" square base safely holds up to 40,000 lbs
- Dual pin-style stand with four adjustment positions



S022 22-ton steel jack stands

- 11" flat square base prevents sinking into concrete or other surfaces
- Large flat base rated to safely hold up to 44,000 lbs
- Pin Style Stand with 3 adjustment positions


Heavy-duty stands	S06 (sold as a pair)	S020 (single)	S022 (sold as a pair)
Capacity	6-ton	20-ton	22-ton
Max height	23-11/16"	24"	19-7/8"
Min height	15-5/8"	15-1/4"	13-7/8"
Footprint	11-9/16" x 10-3/8" square base; welded foot pads	15-1/2" square base	11" square base, flat for maximum ground contact
Adjustment	Ratcheting; 11 teeth	Dual-pin; 4 slots	Pin-style; 3 slots in 3" increments
Saddle	V-notch style, 1.2" x 4.2"	6" dia., round steel	3" x 3-3/4" V-notch

Under-axle service jack	UA22	UA27
Capacity	22-ton	27.5-ton
Air pressure	90 - 145 PSI	90 - 175 PSI
Max height	20-2/3" with longest saddle	21-3/8" using longest saddle
Min height	8.27"	8-1/4"
Handle length	47.24" T handle with lowering lever and air-chuck hook	48-3/4" T handle with lowering lever and air-chuck hook
Footprint	22.63" x 11.73"	22" x 12"
Reach	69.87"	69.87"
Saddle	3" dia., round with center notch, includes 3 lengths	3" dia., round with center notch. Includes 2 saddle adapters
Frame height	8.27"	8.27"
Wheels	2 fixed; 7.88" rubberized steel	2 fixed; 7.88" rubberized steel



UA22 22-ton under-axle hydraulic service jack

- Includes 3 saddle attachments for height adjustment; 3/4" saddle; 1-15/16" saddle; 3-7/8" saddle
- Self-retracting ram activated with handle-end controls

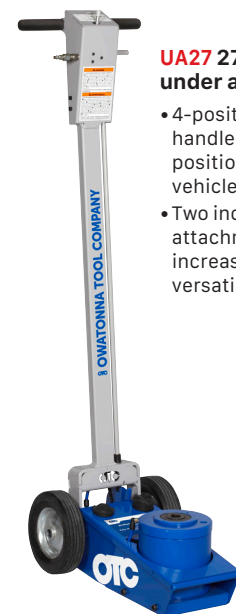

UA27 27.5-ton under axle jack

- 4-position, 48" handle allows easy positioning under vehicles
- Two included saddle attachments increase lifting versatility



5950D
Angled Wire Stripping Tool

- Unique design puts stripping dies on the angled tip
- Patented design makes for easier use in hard to reach places
- Works on 12 to 20 AWG wire




5019A
2,200 Lb. Capacity Low-Lift Transmission Jack

The 8-1/4" low height is perfect for aerodynamic trucks with low ground clearance. Special mounting adapter (No. 540231) fits popular Eaton® Fuller® RoadRanger® transmissions used on nearly all Class 7 and 8 heavy-duty trucks. Mounting plate angle is adjusted with the turn of a wrench. Degree of tilt: 20° back, 15° forward, 12° side to side. Swiveling pump handle permits ease of operation in restricted working spaces. Fast-acting pump quickly raises lifting arm.

1758
Fuel tank handler

- Universal adapter plate and adjustability holds tanks up to 40 gallons
- Unique gearing holds load evenly to balance load over jack Heavy-duty foam-covered risers protect tanks and are individually adjustable
- Fits most transmission jacks

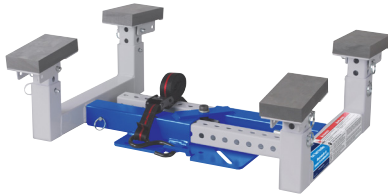

1797
Heavy-duty clutch adapter

- Adapter allows high or low-lift transmission jacks to handle heavy-duty clutch assemblies
- Expands use of your transmission jack; accepts optional splined shaft adapters — 545765, 48596, 48625, 440533 and 600011.
- Includes safety strap to securely hold clutch when moving or working



TJH10
1,000-lb Capacity High-Lift Transmission Jack

- Tilting head for easier R&L and positioning of transmissions and other components
- Hydraulic system uses flash-chromed rams to prevent rust, for long shop life
- Limited lifetime warranty
- Meets all the newest ASME PASE safety standards

1580
1,500 lb. Capacity Easy Roller™



- Provides simple and efficient method of moving a disabled vehicle around a shop environment.
- Fits tread widths up to 12".
- 4 heavy-duty phenolic casters.
- 1,500 lbs. capacity per unit.
- Hydraulic lift mechanism with locking pin.



1580 (sold individually)

1572
Car Dolly (3,600 lbs., capacity pair)

- Innovative patent-pending design — clamps directly to pinch welds to prevent slippage during use.
- Independent units eliminate the need to adjust dolly width for different vehicle designs.
- Each unit has an independently adjustable threaded lift saddle with rubber pads to protect the vehicle frame.
- Universal design for use on all vehicle types without additional adapters.
- Provides easy movement of FWD vehicle after removal of drive train.
- The material on the 5" casters is polypropylene.
- Each unit has 1,800 lbs. capacity (3,600 lbs., pair) with low height of 9" and high of 14".
- May be used with or without tires on vehicle.





Ford Axle Shaft Seal Installers

Correctly installs the seal onto the axle shaft and into the wheel knuckle, preventing front hub vacuum leaks that would cause the 4WD to not engage.

6695

Ford Axle Shaft Seal Installer. Works on 1998-2004 Ford F-250, F-350, F-450, and F-550 4X4s having the vacuum-operated front axle.

6697

Ford Axle Shaft Seal Installer. Works on 2005-newer Ford F-250, F-350, 4X4s having the vacuum-operated front axle.

6698

Ford Axle Shaft Seal Installer. Works on 2005-newer Ford F-450, F-550, 4X4s having the vacuum-operated front axle.



6575

Hub Grappler™ Kit

- Jaws designed and sized to properly fit hub applications and is quickly located on the puller bar without the use of fasteners.
- 3/4" custom drive screw coupled with the special equalizer washer provides smooth operation while proprietary heat treating extends its life 5-10 longer than similar designs.
- Six adapters increase application coverage. Includes tie rod/ball joint tool and two Ford axle installers.
- Included Application Guide is the most comprehensive on the market.



6575H

Hydraulic Hub Grappler™ Kit

- An economical way to increase the performance and speed of wheel bearing and hub service.
- Kit includes a through hole 9-ton ram, OTC 2510A air/hydraulic pump, 6 ft. hose with couplers, drive screw and nut.
- Jaws designed and sized to properly fit hub applications and is quickly located on the puller bar without the use of fasteners.
- 3/4" custom drive screw coupled with the special equalizer washer provides smooth operation while proprietary heat treating extends its life 5-10 longer than similar designs.
- Six adapters increase application coverage. Includes tie rod/ball joint tool and two Ford axle installers.
- Included Application Guide is the most comprehensive on the market.

4406

Adjustable Bearing Race and Seal Driver


- Universal and fully adjustable.
- Twist head to adjustable from 3/4" to 3.5" (19mm to 89mm).
- Lock bolt holds jaws to preferred diameter.
- Steel striking cap mounted on aluminum handle and head provides a weight under 2 lbs.



7832

GM Torsion Bar Unloader

- Larger design to also cover the newer GM truck applications.
- Application; 2011 & newer HD C/K trucks, 2010 and older GM K3500 series trucks with heavy-duty chassis and a larger torsion bar. 1988 to 2003 GMC and Chevrolet 1/2-, 3/4-, and 1-ton pickups; the S-10 Blazer and S-15 Jimmy, 4WD pickups with 4.3L V-6 engines; and 1991 to 2001 Oldsmobile Bravada.

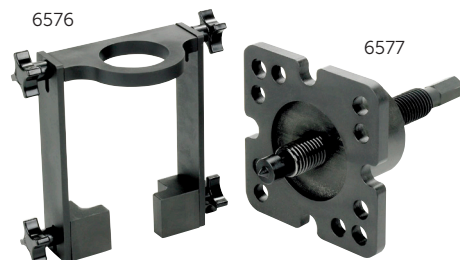

6576S includes both 6576 & 6577

6576S

Dodge Hub Service Set

- Removes stubborn hubs, using 2 methods.
- First, the 6576 Hub Pressing Tool is used to press off the hub with the aid of the power steering. The tool locates spacers between the U-joint yoke and axle housing. Unique design makes this a one person operation to remove the hub with the bearing in tact.
- In the event the Hub Pressing Tool does not budge the hub, the 6577 Hub & Bearing Housing Puller is used. This may separate the bearing, but the unique dual pattern design fits both the wheel hub and bearing housing, capable of applying 20 tons of force.

6576 – Hub Pressing Tool, Fits Dodge

3/4 & 1 Ton 4WD 1994-Present applications.

6577 – Hub & Bearing Housing Puller, Fits Dodge 3/4 & 1 Ton 4WD 1994-Present applications. Also fits GM and Ford 4WD Truck hubs.

8342

Hub Resurfacing Kit

- Fits your power drill to quickly sand rust off studs and mounting surfaces where it is important to have a clean and debris free surface.
- The tool features a 1/4" dia. shank and a stud clearance pilot hole that accepts up to 1/2" studs.
- Sanding pads attach with Half turn thread.
- Includes holder and five sanding discs.
- Run at speeds between 5,000 - 20,000 rpm or less for best results.



7045B

Front Coil Spring Compressor

This compressor fits most late-model rear wheel drive domestic vehicles in which the coil springs are between the upper and lower control arms. The tool features four case-hardened, self-aligning plates to ensure correct load distribution under tension. Includes two 3-3/8" ID plates and two 4" ID plates. Will not work on Mercedes-Benz vehicles.

7816

Ford Torsion Bar Adjustment Tool

Before servicing a torsion bar on 1995-2001 Ford Explorer and 1998-2001 Mercury Mountaineer vehicles, you must first contain the bar to avoid possible damage. This tool securely accomplishes that task, allowing you to make adjustments.



7826

Ford Truck Torsion Bar Tool

This tool firmly holds the torsion bar on Ford light-duty trucks while you adjust or service the front suspension. Without it, a torsion bar could unwind and possibly cause damage. The tool fits 1997-2003 Ford F-150 4WD pickups, 1995-2001 Ford Explorer 4WD, 1998-2001 Mercury Mountaineer, and 1998-2001 Ford Ranger.



Electric Vehicle Charging Solutions

EV300 Level 2 Charging Station

- Easy to install and use
- Industry standard NEMA 14-50 plug Included
- NEMA 3R-rated enclosure for indoor or outdoor installation (outdoor installation requires in-use cover over receptacle)
- Compact design ideal for areas with limited space (indoor and outdoor)
- Includes tamper resistant mounting bracket
- Easy to manage 16' cable
- 240V, 32A capacity for faster vehicle charging
- Up to 6 times faster than a standard wall outlet
- SAE J1772 charging connector is compatible with all EVs in North America
- 3 year warranty



EV300

NEW

EV400 Series Level 2 Charging Station

- 25' cable is the longest available for more versatility and installation locations
- NEMA 3R-rated enclosure for indoor or outdoor installation (Outdoor installation requires in-use cover over receptacle)
- SAE J1772 charging connector is compatible with all EVs in North America
- Movable, plug-in installation allows charging when you need it, leaving an open outlet when not charging
- Safely charges in all weather conditions - rain, snow, sleet, ice and extreme heat or cold
- Bracketless mounting for fast and easy installation
- Clear, bright LEDs indicate charging and power status, stop and reset functions
- Industry leading 4 year warranty



EV410

Made in the USA

EV810 Series Level 2 Charging Station

- NEMA4X-rated enclosure is weatherproof for safe charging in any weather or location
- SAE J1772 charging connector is compatible with all EVs in North America
- Flexible mounting. Hardwire from back, top, or side. Can be fitted with included NEMA plug
- Movable, plug-in installation option allows charging when you need it, leaving an open outlet when not charging
- 3 year warranty



EV810

Made in the USA

EV3000 DC Fast Charger

- Charge up to 4 times faster than Level 2 AC charging stations
- 30KW DC Charger ideal for fleets, public parking lots and dealerships
- Can charge new vehicles that operate at higher voltages
- SAE J1772 CCS cable included. Compatible with nearly all battery electric vehicles sold in NA
- Wall mountable
- High resolution LCD display
- IP55 rated enclosure for indoor or outdoor installation
- 3 year warranty



EV3000

NEW

Bosch Customer Service
800 321-4889
(Ext. 4, Option 2)

OTC and Robinair Customer Service
800 533-6127
(Option 1)

23090332_Muscle Tools_Q4 2023 edition, Printed in U.S.A.

All Bosch EV chargers meet either UL/cUL or ETL/cETL safety standards on full units

EV850 Series Single Bollard Charging Station

- Galvanized steel bollard for parking lot and commercial use - 1/2" thick galvanized steel bollard protects against car bumpers, shopping carts and vandalism, protecting your investment
- NEMA4X-rated enclosure is weatherproof for safely charging in any weather or location
- SAE J1772 charging connector is compatible with all EVs in North America
- Hardwire installation and protective bollard creates safe, tamper-proof setup
- Also available as EV860 Dual bollard charging station with two EV810 Series charging stations in a galvanized steel bollard



EV850

EV860

Made in the USA

Made in the USA